



# **U7242A USB3.0 Test Fixture**

## **User's Guide**



**Agilent Technologies**

# Notices

© Agilent Technologies, Inc. 2009

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Agilent Technologies, Inc. as governed by United States and international copyright laws.

## Manual Part Number

U7242-97000

## Edition

First edition, May 2009

Agilent Technologies, Inc.  
1900 Garden of the Gods Road  
Colorado Springs, CO 80907 USA

## Warranty

**The material contained in this document is provided “as is,” and is subject to being changed, without notice, in future editions. Further, to the maximum extent permitted by applicable law, Agilent disclaims all warranties, either express or implied, with regard to this manual and any information contained herein, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Agilent shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein. Should Agilent and the user have a separate written agreement with warranty terms covering the material in this document that conflict with these terms, the warranty terms in the separate agreement shall control.**

## Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

## Restricted Rights Legend

If software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as “Commercial computer software” as defined in DFAR 252.227-7014 (June 1995), or as a “commercial item” as defined in FAR 2.101(a) or as “Restricted computer software” as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Agilent Technologies’ standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as

defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

## Safety Notices

### CAUTION

A **CAUTION** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a **CAUTION** notice until the indicated conditions are fully understood and met.

### WARNING

A **WARNING** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a **WARNING** notice until the indicated conditions are fully understood and met.

# Contents

U7242A USB 3.0 Test Fixture Description	5
Fixture and Accessories	6
Dimension	6
Characteristics, Regulatory, and Safety Information	7
Electrical Characteristics	7
Operating and Non-operating Environmental Characteristics	7
Safety Information	7




## U7242A USB 3.0 Test Fixture Description

The U7242A USB3.0 test fixture is required to perform the measurement with the Agilent U7243A USB3.0 Electrical Compliance Test Application. The fixture helps you to easily access the USB3.0 test signals.

The U7242A USB3.0 test fixture is required for the all the Far End (TP1) tests including:

- Far End Unit Internal test
- Far End SSC Slew Rate test
- Far End Template test
- Far End Peak-to-Peak Differential Output Voltage test
- Far End RMS Random Jitter test
- Far End Maximum Deterministic Jitter test
- Far End Total Jitter at BER-12 test

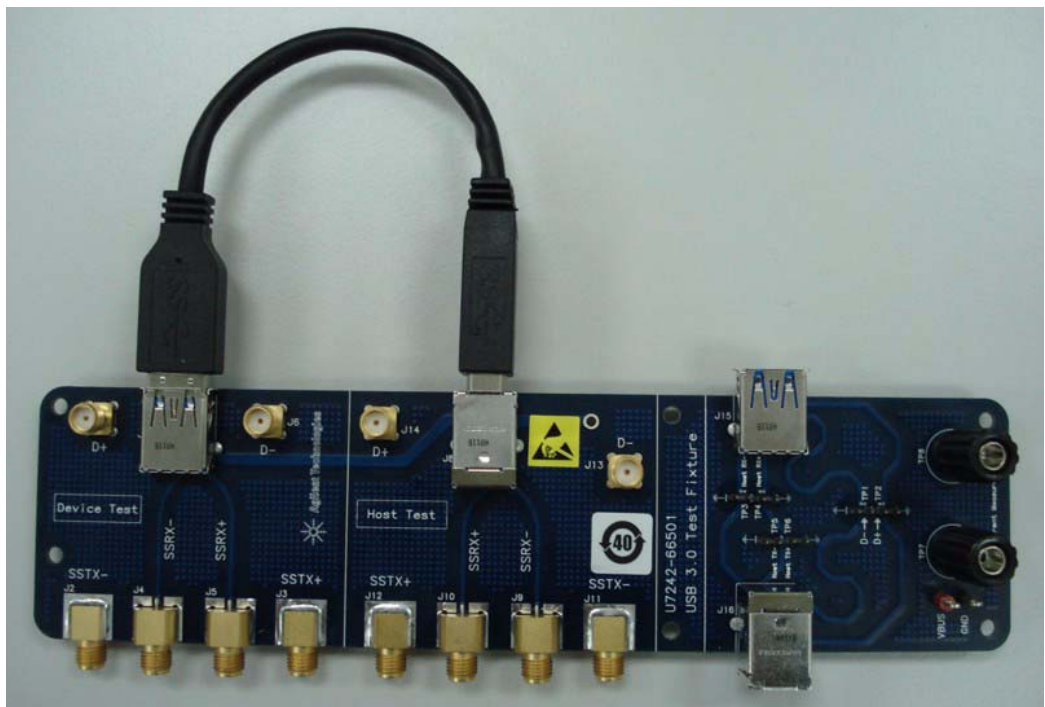

**Figure 1** U7242A USB3.0 Test Fixture Board

## Fixture and Accessories

The complete set of USB3.0 test fixture contains the following items:

Part Number	Description	Quantity
U7242-66501	USB 3.0 test fixture	1 unit
8121-1880	USB 3.0 Std-A to Std-B cable (4 inches)	1 unit
8121-1924	USB 3.0 Std-A to Std-B cable (3.1 inches)	1 unit
1253-8358	Double Banana Plug With Shorting Bar	1 unit

## Dimension

The dimension of the U7242A test fixture board is as follows:

PCB board height = 2.00 inches

PCB board width = 7.75 inches

PCB board thickness = 0.063 inches

# Characteristics, Regulatory, and Safety Information

## Electrical Characteristics

The following electrical characteristics are the specification of the U7242A USB3.0 test fixture:

Description	Specification
Trace Impedance	100 ohm $\pm$ 10%
Mated Connector	90 ohm $\pm$ 10%
Cable	90 ohm $\pm$ 10%

## Operating and Non-operating Environmental Characteristics

The following are the environmental characteristics of the U7242A USB3.0 test fixture:

Description	Minimum Requirement
Ambient temperature	Operating = 0°C to 40°C Non-operating = - 51°C to 71°C
Humidity	Operating = 95% RH at 40°C for 24 hours
Altitude	Operating = 4,570m (15,000 ft) Non-operating = 15,244m (50,000 ft)
Indoor use	This fixture is rated for indoor use only
Random vibration	HP/Agilent class B1 and MIL-PRF-2880 OF Class 3 random
Mechanical shock	HP/Agilent class B1 and MIL-PRF-2880 OF (operating 30g, 1/2 sine, 11-ms duration, 3 shocks/axis along major axis. Total of 18 shocks)

## Safety Information

The U7237A 10GBASE-T transmitter test fixture herewith complies with the essential requirements of the Low Voltage Directive 73/23/EEC and the EMC Directive 89/336/EEC, and carries the CE-marking accordingly. The product was tested in a typical configuration with HP/Agilent test systems.

The following are the safety regulatory information of the U7237A 10GBASE-T transmitter test fixture:

**Minimum Requirement:**

IEC 61010-1: Second edition 2001-2

EN 61010-1:2001

UL3111-1 or UL 6101B-1:2003 (must be an Agilent ID)

Canada: CSA-C22.2 No. 1010.1:1992





[www.agilent.com](http://www.agilent.com)

© Agilent Technologies, Inc. 2009

First edition, May 2009



U7242-97000



**Agilent Technologies**